## ICB-DV Platinum Edition, 120V

Height: 26.8" Width: 10.2" Depth: 22.1" (68.1cm) (25.9cm) (56.1cm)





- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- USB programming for uploading and downloading recipes and software updates, all in less than a minute
- Brews into 2.5 to 3.8L (84 to 128 oz) airpots and 3.8 to 5.7L (1 to 1.5 gallon) baseless Thermofresh servers
- BUNN Infusion Series technology allows for multiple recipes from one footprint
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of the brew funnel until drip-through is complete
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing
- Hot water faucet (supplied for custom installation)
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)
- Servers not included unless otherwise noted

#### Agency:

Funnel: Stainless Steel





### **Specifications**

**Product #:** 53300.0100

Water Access: Plumbed Interface: Wireless

Finish: Stainless

#### **Additional Features**

BrewWISE

## **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	Yes	NEMA 5-15P	82	60°F (15.5°C)	1	2	60
120/208	14	2900	-	N/A	136	60°F (15.5°C)	1	3	60
120/240	17	4050	-	N/A	181	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements


Trambing Requirements						
PSI kPa		Fitting Supplied	Water Flow Required (GPM)			
20-90	138-621	3/8" Male Flare Fitting	1.00			


## **CAD Drawings**

2D	Revit	KLC
•		

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



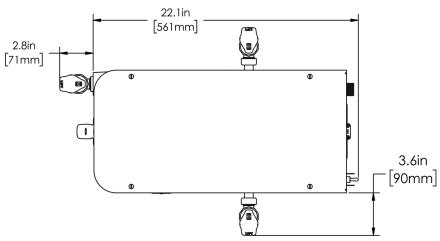

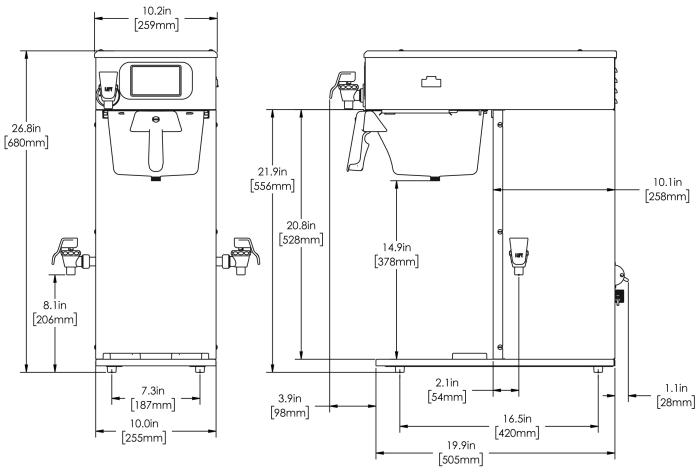

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	26.8 in.	10.2 in.	22.1 in.	34.9 in.	13.3 in.	27.4 in.	53.750 lbs	7.321 ft³
Metric	68.1 cm	25.9 cm	56.1 cm	88.6 cm	33.7 cm	69.5 cm	24.381 kgs	0.207 m³



## Related Products & Accessories: ICB-DV Platinum Edition, 120V(53300.0100)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000

FUNNEL ASSY, SST INFUSION COFFEE

Product #: 54675.0001



# Serving & Holding Options: ICB-DV Platinum Edition, 120V(53300.0100)



AIRPOT, 2.5L GL PB SINGLE PK

Product #:13041.0001



AIRPOT, 2.5L GL PB 6/ CASE

Product #:13041.0101



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 2.5L SST LA 6/ CASE

Product #:32125.0100



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



AIRPOT, 3.0L SST LA 6/ CASE

Product #:32130.0100



AIRPOT, 3.8L SST LA SINGLE PK

Product #:36725.0000



AIRPOT, 3.8L SST LA 6/ CASE

Product #:36725.0100



STAND ASSY, TF SERVER

Product #:39795.0003



TF SERVER, DSG2 1G SST NOBASE

Product #:42700.0050



TF SERVER, DSG2 1G BLK NOBASE

Product #:42700.0051



TF SERVER, 1G DSG GEN3 NOBASE

Product #:42700.0250



TF SERVER,DSG2 1.5G SST NOBAS

Product #:42750.0050



TF SERVER, 1G/3.8L MECH NOBASE

Product #:44000.0050



TF SERVER, 1G/3.8L MECH BLK NOBASE

Product #:44000.0051



TF SERVER, 1G MECH GEN3 NOBASE

Product #:44000.0250



Product #:54473.0000



STAND ASSY KIT, TF SERVER

Product #:54473.1000

