


CHILLER DADDY®



- “Rust Free” 304 Stainless Steel Inside and Out – All Cabinet Components Including the Nuts, Bolts, Washers, Screws and Drain Cap are all 304 Stainless Steel.
- 100% 304 Stainless Steel Internal Water Contact Waterway, Even the Drain Cap. This Assures That Water Only Ever Contacts 304 Stainless Steel. Totally hygienic and pure.
- 3 Way Noise Canceling System – Advanced “Acoustic Decoupling” Makes Chiller Daddy Almost Silent.
- Increased Performance Over the Competition. Larger Capacity and Faster Recovery.
- Price Advantage – Affordable Monthly Rental \$30.00
- info@thecoffeeconnection.ca

Superior Design


Water Inlet To Faucet

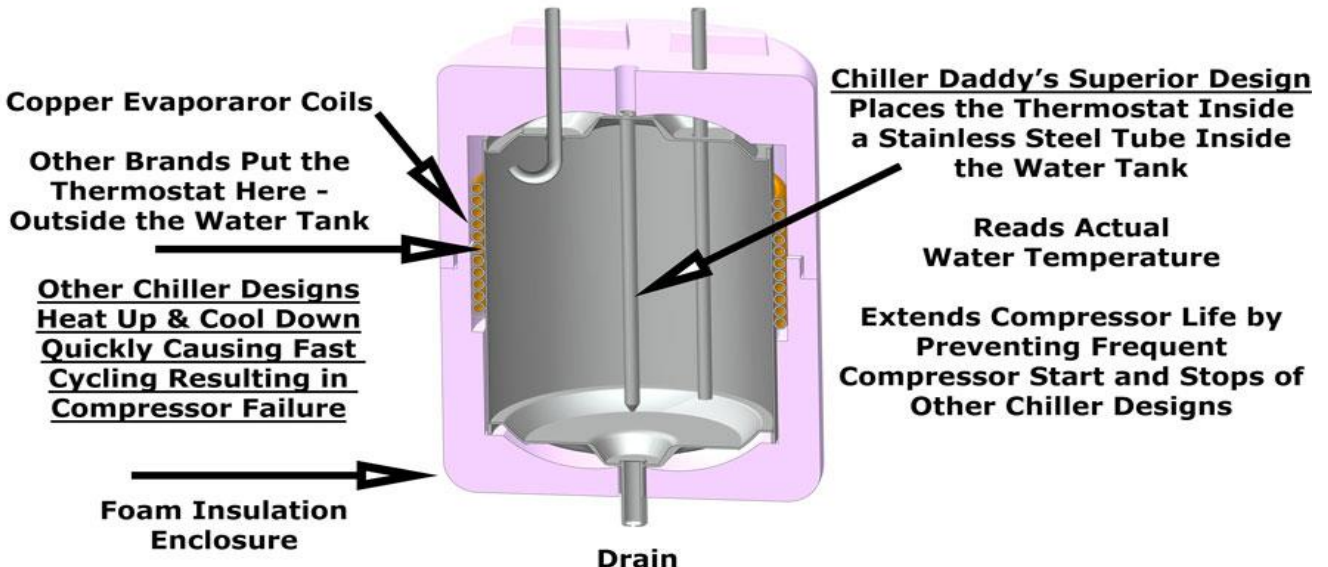

Specifications

SUS304 Food Grade Stainless Steel inside and out. Premium Quality In Every Detail !

Chiller Daddy ® CHL-750XL Undersink Water Chiller Specifications

Model #:	CHL-750XL								
Product Type:	Undersink Water Chiller for Residential and Office Use								
Product Dimensions:	L: 16" x W: 8" x H: 13.38" (406x203x340)								
Product Weight:	23.75 lbs (10.8 KG)								
Shipping Dimensions:	L: 20.87" x W: 13" x H: 16.93" (530x330x430)								
Shipping Weight:	27.25lbs (12.5 KG)								
Product Color:	Appliance Grade Designer Brushed 304 Stainless Steel Cabinet								
Application:	Chills Drinking Water for Residential and Office Use. Connects to RO Reverse Osmosis and Filtered Drinking Water Systems.								
Warranty:	1-Year Non-Transferable Limited Manufacturer's Warranty *								
Power:	110 Volts 60Hz 3 Prong 72" Grounded Cord Attached 1.8A 140W - Motor-Compressor Thermally Protected								
Certifications:	 <p>Conforms to UL Standard 399. Certified to CSA Standard C22.2 #s 60335-2-24 & 60335-1</p>								
Refrigerant Type:	R-134a 54g (1.9oz) Environmentally Friendly								
Inlet Pressure:	15~100psi (0.10~0.69MPa) Optional Pressure Limiter Available For Use If Installation is Not On a Reverse Osmosis RO System or Over 100 PSI. 30-50 psi (factory preset to 40 PSI) Pressure Limiter Allows Adjustable Flow Rate to the Faucet.								
Cold Water Output:	1.75 Gallons Per Hour (6.6 Liters 6.6L/H (<10C))								
Tank:	SUS304 Stainless Steel 0.8 Gallon (3L)								
Connections:	1/4" O.D. Stainless Steel Tubes In & Out Drain Cap is G 1/4" BSPP Thread Stainless Steel								
Cold Water Thermostat Temperature Range:	42 - 54°F Adjustable Thermostat - Factory Preset for Normal Use ***								
Distributed in Alberta by; The Coffee Connection www.thecoffeeconnection.ca info@thecoffeeconnection.ca	<table> <tr> <td>Calgary</td> <td>403.269.5977</td> </tr> <tr> <td>Red Deer</td> <td>403.342.5977</td> </tr> <tr> <td>Edmonton</td> <td>780.438.5976</td> </tr> <tr> <td></td> <td>info@thecoffeeconnection.ca</td> </tr> </table>	Calgary	403.269.5977	Red Deer	403.342.5977	Edmonton	780.438.5976		info@thecoffeeconnection.ca
Calgary	403.269.5977								
Red Deer	403.342.5977								
Edmonton	780.438.5976								
	info@thecoffeeconnection.ca								
UPC#:	850003338149								

*Chiller Daddy® warranty contact